

# Water Transfer

## Centrifugal Pumps



### 400 Series




- The 400 series is constructed of high grade corrosion-resistant materials
- Provides water flows up to 270 litres a minute or maximum pressure up to 26 metres
- Model 413 is ideally suited to circulation duty in hydroponic greenhouses and water transfer
- Casings are moulded out of strong ABS, making them suitable for the harshest of conditions

#### Applications:

- High flow water transfer, light industrial and animal hygiene stations



400 Series Performance

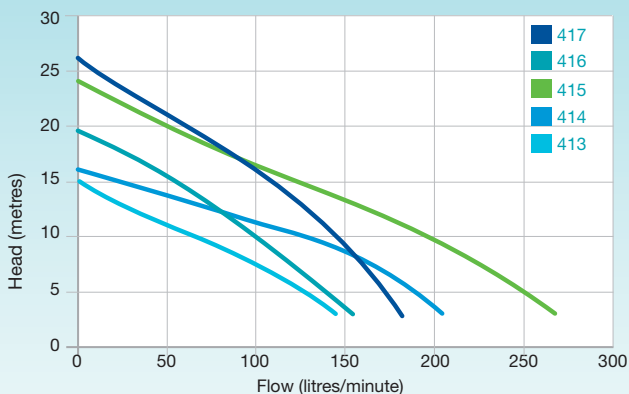

Model	kW	Voltage	Current (Amps)
Hi-Flo 417	0.75	240	4.2
Hi-Flo 416	0.37	240	2.6
Hi-Flo 415	0.75	240	4.3
Hi-Flo 414	0.37	240	2.6
Hi-Flo 413	0.37	240	2.5

#### Suction & Discharge

112 & 400 series are all 1 1/4" male BSP Suction & Discharge.  
413 series is 1" male BSP Suction & Discharge.  
252 is 1 1/4" female BSP Suction & Discharge.