

DUAL CHECK VALVES


Dual checks provide protection to the potable water supply from contamination in low hazard applications like meter connections on domestic properties.

SPECIFICATIONS

- Body: Bronze
- Check Springs: Stainless steel
- Minimum Working Pressure 220kPa
- Maximum Working Pressure 1200kPa
- Compact and lightweight
- Corrosion resistant
- Independently operating check valves
- Operating temperature range of 1°C to 60°C
- Suitable for vertical and horizontal installations
- Approved to AS 2845-1
- * Low Hazard Rating



AS2845.1
Lic 1335

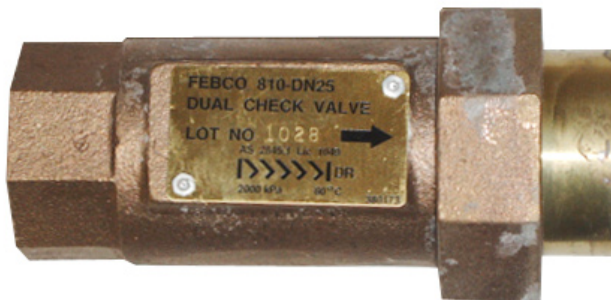

810-FF-25MM

MODELS	CODE
20mm Dual Check F x F 20mm	810-FF-20MM
25mm Dual Check F x F 25mm	810-FF-25MM
25mm Dual Check M x F 25mm	810-MF-25MM

PERTH

PH: 08 9455 1677
FAX: 08 9455 1680
hrproducts@bigpond.com.au

SYDNEY

PH: 02 9725 5733
FAX: 02 725 5283
nsw_hrproducts@bigpond.com

MELBOURNE

PH: 03 9457 7500
FAX: 03 9457 7400
vic_hrproducts@bigpond.com

BRISBANE

PH: 07 3806 0522
FAX: 07 3806 0533
qld_hrproducts@bigpond.com

ADELAIDE

PH: 08 8341 0008
FAX: 08 8341 0707
sa_hrproducts@bigpond.com