


## BIANCO RAINSAVERMK3E

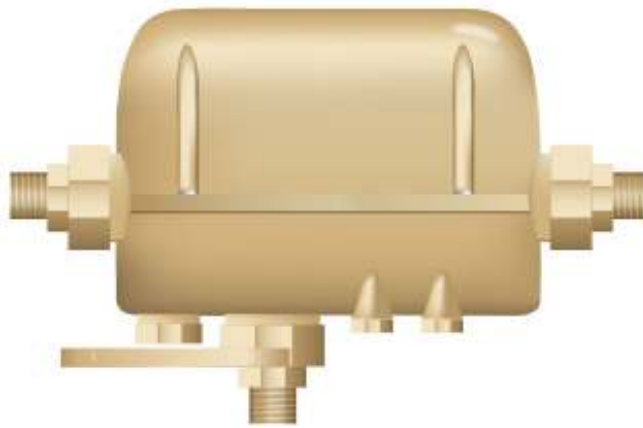

The RAINSAVERMK3E is an Automatic Rainwater / Mains Water Changeover Device designed to provide automatic mains back up for Pressure Pump supply systems.

The RAINSAVERMK3E is designed to be installed in conjunction with a Pressure Pump supply system that is fitted with an independent pressure and flow controller with loss of prime.

### **General Specifications:**

Controls pumps to a maximum 1.5 hp, 1.1 kW 240V.  
Maximum water temperature (mains + pump): 40° C.  
Maximum recommended continuous pump flow: 100 litres per minute.  
Maximum recommended pump pressure: 800 kPa.  
Maximum recommended mains inlet pressure: 800 kPa.  
Low voltage float switch output 12V.  
Low voltage float switch cable 10 metres.  
Option of "finger" type float switch.

Power supply lead 2 metres.

4 year in-field warranty, see installation and operating manual for details.  
WaterMark Level 1 Certification to ATS5200.477:2006, License No. 23022.

### **Operation:**

The RAINSAVERMK3E supplies clean rainwater from a rainwater tank via an automatic pressure system pump to toilets, laundry and garden taps in a household.

Mains water is also connected to the RAINSAVERMK3E as an automatic back up should rain water level be too low, or if there is a power or pump\* failure).


\*Should there be a pump failure, mains back up is achieved by turning the RAINSAVERMK3E off at the power point.

The low voltage float switch supplied prevents the pump from running dry and allows automatic switch over to mains supply should the rain water level in the tank be too low.

2 Year Rainsaver In-Field Warranty (controller only)

**Part No: BIA-RAINSAVERMK3E**

# RAINSAVER MKIII MAINS INLET PRESSURE DROPS

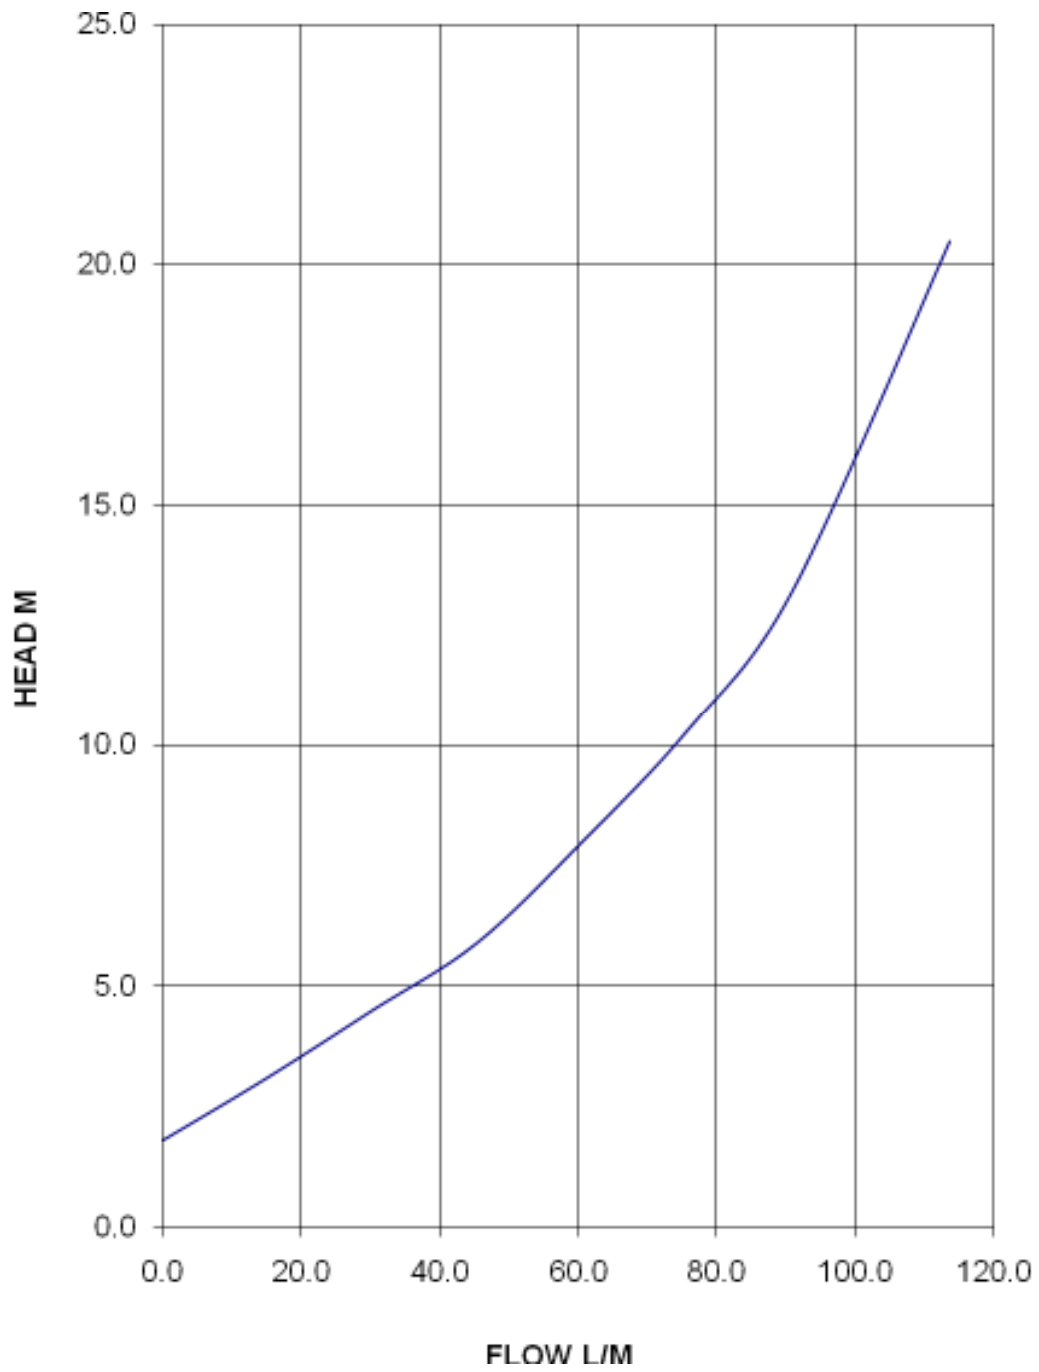

# RAINSAVER MKIII PUMP INLET PRESSURE DROPS

