

**APPLICATIONS**

Household hot water circulation


**FEATURES**

- Meets requirements of AS/NZS 4020 “Testing of products for use in contact with drinking water”. No risk to alter the water quality thanks to the main components in stainless steel (pump housing, bearing plate, stator and rotor can In stainless steel Aisi 304)
- Interchangeable with most of the installed bronze models (150mm port to port - G 1”1/4)
- Especially designed for hot water application  
UP20-45N model can also be used with chilled water from -25°C



**TECHNICAL FEATURES**

Model		UP20-30N	UP20-45N
Voltage	V	1 x 240	1 x 240
P1	W	90	115
In	A	0.34	0.48
Enclosure & Insulation class		IP44/F	IP42/F
Liquid temperature range	°C	+2°C to +110°C	-25°C to +110°C
Port to port dimension	mm	150	150
Union set (pn 52-99-82)		3/4" F	3/4" F
Net weight	kg	2.1	4

**INSTALLATION**

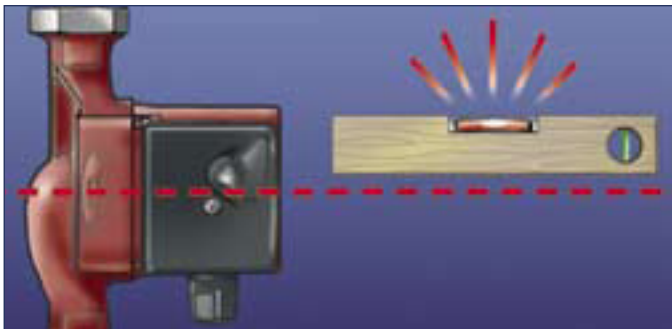

**PERFORMANCE**

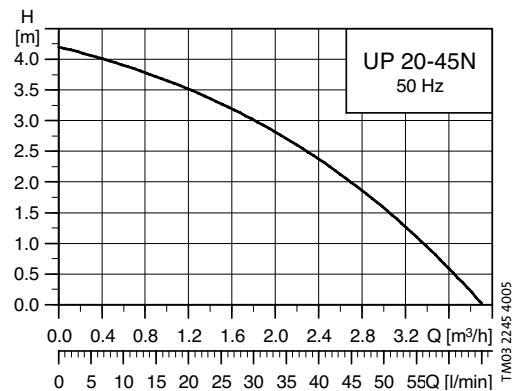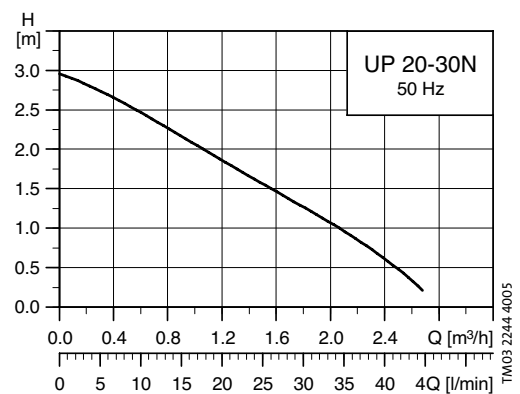

**DIMENSIONS**

