

APPLICATIONS

The Hilift 35 is a multi-purpose submersible pressure pump ideal for rain water systems, grey water irrigation, operating sprinklers, and pumping water from tanks.

FEATURES



- Silent alternative to surface pumps
- Environmentally safe, oil-free
- Ceramic shaft sleeve for long life
- Built-in thermal overload protection

CONSTRUCTION

- Composite and stainless steel materials
- Anti-debris stainless steel strainer
- Supplied with 10m lead and plug, non return valve, float switch and a hose adapter for 3/4" and 1" thread or clamp version
- 1 x 240V, IP68 motor, Class B


PERFORMANCE

| Pumps | Discharge Pressure (kPa/psi) | | | |
|----------------|------------------------------|-----|-----|-----|
| | 150 | 200 | 250 | 300 |
| | 22 | 29 | 36 | 44 |
| Output (l/min) | | | | |
| Hilift 35 A-1 | 68 | 55 | 40 | 20 |

As a guide 1 tap  = 10 litres per minute • 1 sprinkler  = 15 litres per minute

TECHNICAL FEATURES

| Pumps | Cable (m) | P1 (kW) | 1 ph In (A) | Water temp* | Outlet | Dimensions | | Weight (kg) | Flow Rates | | | | | | | | |
|---------------|-----------|---------|-------------|-------------|--------|------------|-----|-------------|-------------------|-----|-----|-----|-----|----|-----|-----|-----|
| | | | | | | D | H | | l/min | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| Hilift 35 A-1 | 10 | 0.76 | 3.8 | 0/35°C | 1" F | 150 | 397 | 8.7 | m Head | 33 | 31 | 28 | 25 | 22 | 18 | 15 | 10 |
| | | | | | | | | | m ³ /h | 0.6 | 1.2 | 1.8 | 2.4 | 3 | 3.6 | 4.2 | 4.8 |

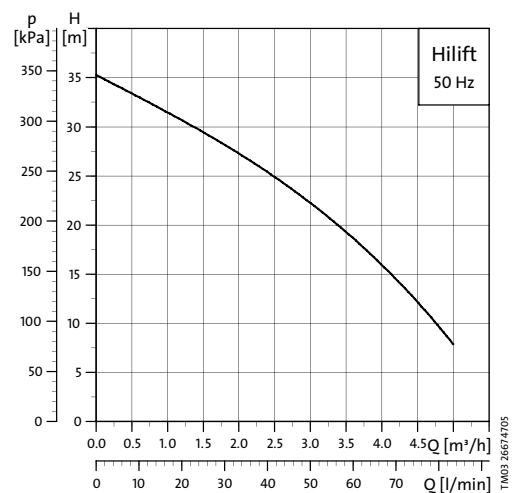

DIMENSIONS / INSTALLATION

