

Farm Pumps

Onga Farmmaster Shallow Well Pumps & Injectors

Your Onga dealer can tailor these strong and versatile pumps to your particular requirements, using interchangeable internal components delivering you the efficiency you demand. You don't have to compromise – Farmmaster pumps adapt to your needs. If electricity is a problem at your site, choose Honda petrol or Yanmar diesel power.

Model (Watts)	Injector model	Pressure switch setting (kpa)	Suction lift (M)	DISCHARGE HEAD (METRES)												Maximum Pump pressure (kpa)			
				15	21	27	34	40	46	52	58	64	70	76	82		88	95	
				CAPACITY (LITRES PER MINUTE)															
OJ700 (1500W)	S700	210-350#	0	162	159	138	80	27										430	
			3	130	127	110	64											400	
			6	92	91	79	46												370
			7.6	65	64	55	32												355
	S701	280-455	0			114	94	61	31										540
			3			91	75	49	25										510
			6			65	54	35	18										480
			7.6			46	38	24	12										465
	S702	350-560	0				85	66	42	24									635
			3				68	53	34	19								605	
			6				48	38	24	14									575
			7.6				34	26	17	10									560
	S703*	420-630	0					69	50	35	22								690
			3					55	40	28	18							660	
			6					39	29	20	13							630	
			7.6					28	20	14	9							615	
S704*	490-700	0					56	51	39	28	18	11						800	
		3					45	41	31	22	14	9					770		
		6					32	29	22	16	10						740		
		7.6					22	20	16	11	7						725		
OJ800 (2400W)	S800	210-350#	0	245	241	218	156	72										430	
			3	196	193	174	125											400	
			6	140	137	124	89											370	
			7.6	98	96	87	62											355	
	S801	280-455	0		215	204	160	116	66										525
			3		172	163	128	93	53									495	
			6		123	116	91	66										465	
			7.6		86	82	64	46										450	
	S802	350-560	0			154	150	117	85	54	25								635
			3			123	120	94	68	43	20							605	
			6			88	86	67	48	31								575	
			7.6			62	60	47	34	22								560	
	S803*	420-630	0					112	88	64	42	25							730
			3					90	70	51	34	20						700	
			6					64	50	36	24	14						670	
			7.6					45	35	26	17	10						655	
	S804*	490-700	0						90	67	47	31	18						800
			3						72	54	38	24	14					770	
			6						51	38	27	18	10					740	
			7.6						36	27	19	12	7					725	
	S805*	630-840	0							70	57	43	31	21					970
			3							56	46	34	25	17				880	
			6							40	32	25	18	12				850	
			7.6							28	23	17	12	8				835	
S806**	770-1050	0											34	33	30	25	18	1145	
		3											27	26	24	20	14	1115	
		6											19	18	17	14	10	1085	
		7.6											14	13	12	10	7	1070	

Factory pressure switch setting. Pump suction 1 1/2" BSP Female.
Pump discharge port 1" BSP Male (pump), 1" BSP Female (pressure kit).
* When ordering specify OJ800 and High pressure Aqua Packs.
Models may be purchased as single or three phase.

OJ Range



The Farmmaster OJ range are the flagship of the Onga range, offering performance, efficiency and reliability in a solid cast iron casing. The bottle shaped casing allows easy escape for air and aids the pump in priming suction lines.


Applications: Stock watering, irrigation and water transfer from dams, creeks, wells and bores.



OJ800 with Sig. 2000 tank



OJ700 Performance

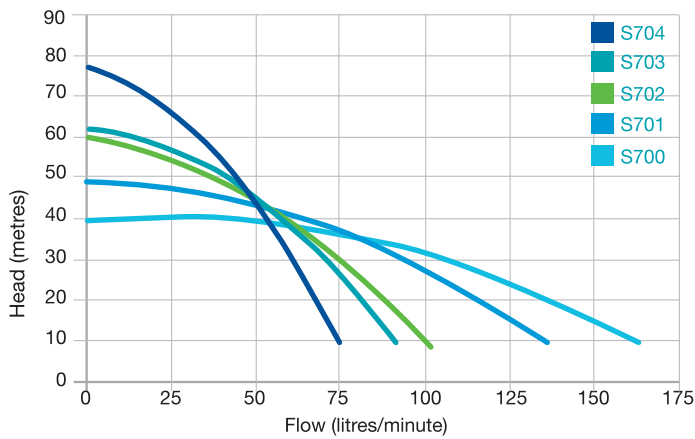

OJ800 Performance

